

PATCH PANEL

لوحة تجميع شبكة مركزية



*It's benefits that, staraight on wall,
fast installation, low manpower, save
time and cost- effective solutin.*


	Width=600 mm.		Depth=450 mm.		
U	7	9	12	16	20
Width (W) in mm	600	600	600	600	600
Depth (D) in mm	450	450	450	450	450
Inside Height (h) in mm	333	422	555	733	911
Outside Height (H) in mm	402	491	624	802	980

	Width=600 mm.		Depth=560 mm.		
U	7	9	12	16	20
Width (W) in mm	600	600	600	600	600
Depth (D) in mm	560	560	560	560	560
Inside Height (h) in mm	333	422	555	733	911
Outside Height (H) in mm	402	491	624	802	980

	Width=600 mm.		Depth=160+450 mm.		
U	7	9	12	16	20
Width (W) in mm	600	600	600	600	600
Depth (D) in mm	160+450	160+450	160+450	160+450	160+450
Inside Height (h) in mm	333	422	555	733	911
Outside Height (H) in mm	402	491	624	802	980

All giving you four way access to equipment.

DOUBLE SECTION

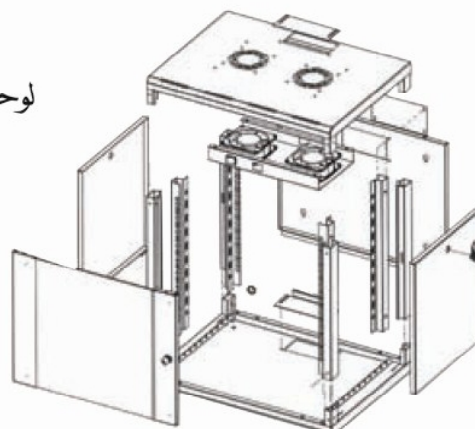

*Front door features a full-lenght
smoked and shatterproof glass door
with decorative accent trim reinforced
with left & right metal rames and integral
locking mechanism.*



*Cabinets rear service
door is removable.*

*It is removed easily and
one prople enough to sign
dril fix on the wall.*

3 Different Depths

Depth - 450 MM

Depth - 560 MM

Depth - 160+450 MM

Double section.

5 Different Height

7U - 9U - 12U

16U - 20U